


**T-60GB**  
使用说明书


祝贺您拥有了Musedo T-60GB夹式校音器。在您首次使用本产品之前，请花几分钟时间阅读一下本说明书。

**产品界面**


· 正面示意图

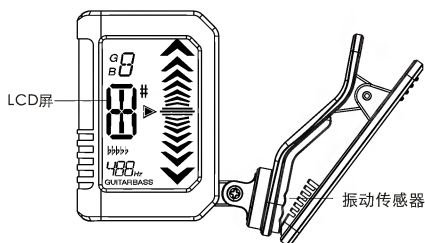

· 背面示意图

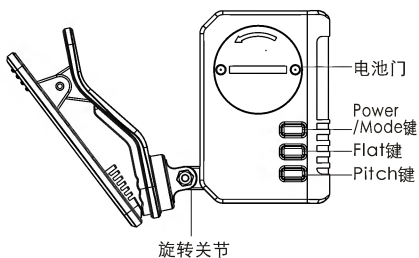

· LCD示意图

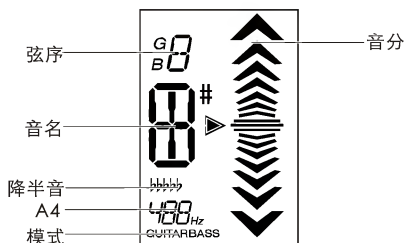

降半音	N/A, b, bb, bbb, bbbb, bbbbb	
音名	吉它	6E、5A、4D、3G、2B、1E
	贝司	1B、4E、3A、2D、1G、HC
A4	430~450 Hz	
LCD	绿色	校准
	橙色	音偏高或偏低
音分指示条	-50~0~+50，每格7音分	
信号输入	振动传感器	

**产品特点**

- 1、采用蔚科公司最新开发的软件，快速、准确、稳定地校音。
- 2、吉它/贝司专用校音器。
- 3、时尚的外形，宽屏LCD显示，双色背光显示带来更直观的视觉享受。
- 4、多关节、多角度调整视角，转动关节使用金属内轴设计，转动更加流畅，耐用。
- 5、自带可调夹，使校音器更稳固地夹在不同厚度的乐器上。
- 6、内置蜂鸣器带来最佳的震动感应效果。
- 7、5分钟内没有有效信号输入或无按键操作时会自动关机。
- 8、背光颜色的变换配合使音分偏差的显示更加直观。
- 9、每次关机，本机可自动保存当前的设置参数。

**操作流程**


- 1、上电默认吉它校音模式，长按POWER键关机，再次长按开机
- 2、按PITCH调节A4:430~450Hz
- 3、按FLAT键调节降半音：N/A→b→bb→bbb→bbbb→bbbbb
- 4、短按MODE键调节校音项目：G（吉它）、B（贝司）
- 5、音准时，背光亮绿色；音偏高或偏低背光亮橙色。

**技术规格**

- 校音项目：吉它、贝司
- 校音范围：A0(27.5Hz)~C8(4186Hz)
- 信号输入模式：振动传感器
- 信号检测速度：<20毫秒
- 校音精度：±1音分
- A4范围：430~450Hz
- 降半音：N/A, b, bb, bbb, bbbb, bbbbb
- 电池：CR2032
- 功耗：  
· 校音状态电流<15mA
- 外形尺寸：59 (L)x12(W)x53(H)mm
- 重量：26克

**电池更换**

当LCD变暗时，请及时更换电池，如下图：

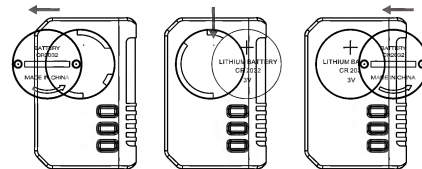

注：在放入电池时请注意电池正负极方向。

**注意事项**

- 使用环境：
  - 避免在高温、潮湿、零下等恶劣的环境中
  - 避免在强光下使用
- 长期不使用本机，请取出电池。
- 请勿自行拆卸本机。
- 请保存好本手册以便以后查阅。

**随机包装附件**

- 操作说明书
- 产品合格证
- CR2032电池一颗

**质量承诺**

亲爱的**万事多**用户：  
在您使用**万事多**产品时，请仔细参阅产品说明书，当您有疑问和困难时，请拨打售后服务热线：  
133 0293 1293

- 一周内出现质量问题可退货退款
- 一月内出现质量问题可调换
- 一年内出现质量问题可免费维修
- 终身享有咨询和维修服务

**[请向销售商索取有效购买凭证并予以保存]**

**换修政策**

- 一、包换政策：
  - 1、消费者自购机之日起1个月之内，在正常使用情况下，出现非人为的产品性能故障，且产品外观及包装保持完好的可向所购机的经销商换机。
  - 2、消费者在换机时应出示由经销商开出的购机收据及保修卡，否则经销商可以不予更换。
- 二、保修政策：
 

产品在购买之日起1年内，可免费享有维修服务；对于超过1年的产品及人为或不可抗力因素造成损坏的产品，我司可提供有偿维修服务。

深圳市南山区松白路西丽南岗第二工业园A2栋5-6楼  
深圳市蔚科电子科技有限公司售后服务部  
邮编：518108



## T-60GB Owner's Manual



Thank you and congratulations on your purchase of the T-60GB. Using Musedo's proprietary tuning software, the T-60GB tunes faster and more accurately than other tuners of its kind.

### Product Description


T-60GB is a clip-on tuner. The portable design makes it easy to go with you, and it can be easily rotated in different directions and angles so you can aim it where you like.

### Product interface


### • Front face

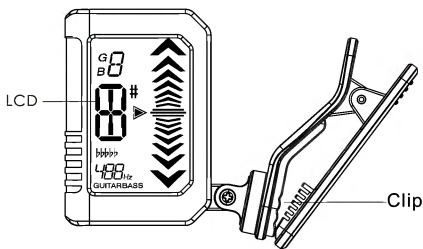

### • Back face

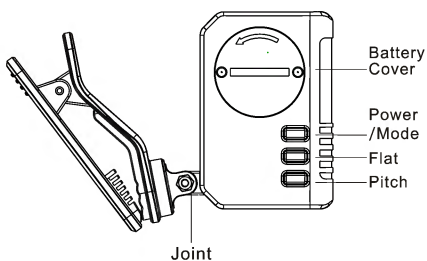


### • LCD Interface

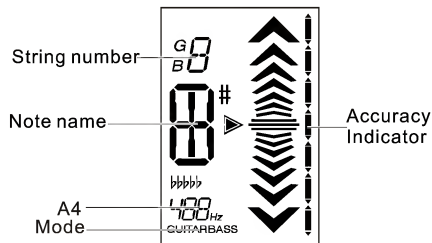

Flat	b, bb, bbb, bbbb, bbbbb	
Note name	Guitar	6E, 5A, 4D, 3G, 2B, 1E
	Bass	LB, 4E, 3A, 2D, 1G, HC
A4	410~490Hz	
LCD	Green	In tune
	Orange	Sharp, Flat
Meter	-50~0~+50, 7cents/segment	
Signal input	Clip	

### Installing the battery

The display includes a battery icon to show the relative charge in the battery. When the battery icon is empty, the LCD will become dim. Please replace the battery as soon as possible.

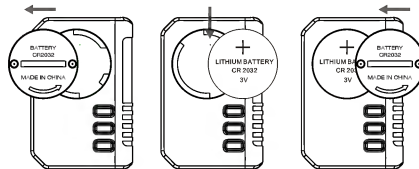

Rotate the battery cover until the compartment opens. Pop the battery out, replace with a new one and rotate clockwise until it locks. Pay attention to polarity.

### Operation

1. Press POWER/MODE to turn on/off T-60GB. Every time you turn the power on, all icons will be displayed for 1 second. The T-60GB will turn on to the last setting. The default Tuning mode is Guitar when first powering on this tuner.

2. Press PITCH to adjust A4 from 430 - 450Hz (1Hz steps)

3. Press POWER/MODE briefly to set mode: Guitar, Bass

4. Press FLAT to set semi-tone:  
b, bb, bbb, bbbb, bbbbb

5. Play a single note on your instrument. The display will show the name of the note and string number closest to the pitch detected by the T-60GB. Tune your instrument until the LCD shows the correct string and note name.

6. Play another single note on your instrument. If the LCD is orange, the "Arrows" are moving up, that means the note is sharp. If the "Arrows" are moving down, that means the note is flat. Tune your instrument until the LCD changes to green

### Specifications

- Tuning scale: Guitar, Bass
- Tuning mode: PIEZO
- Tuning range: A<sub>0</sub> (27.50 Hz) - C<sub>8</sub> (4186 Hz)
- Calibration: 430 - 450Hz (1Hz steps)
- Flat: b, bb, bbb, bbbb, bbbbb
- Precision: ± 1 cent
- Response Time: <20 ms
- Power: 3V (CR2032 lithium battery)
- Power consumption:  
Tuning mode: <15mA
- Dimension: 59(L) x 53(H)X 12(W)mm
- Weight: 26g

### Accessories

- User manual
- QC mark
- CR2032 lithium battery

★Perchlorate Material-special Handling May Apply.